

We Start Engines™

## Goodall® Engine Starting Systems



Since 1939, Goodall® Mfg. has set the standard for engine starting and mobile service equipment. Goodall's line of equipment includes a broad range of jump starters, air compressors, AC generators, and the highest quality, heavy duty cable and clamp products on the market. With this comprehensive selection of industry leading equipment, Goodall® can meet any starting and mobile service challenge.



**Look for the logo that delivers built-in safety!**

The innovations in safety technology include: reverse polarity, low voltage protection, short circuit, overheat protection, over discharge protection, over voltage protection, and open-clamp protection.

# START ALL > Lithium-Ion Jump Starters & Power Packs

**Jump Your Vehicles — Charge Your Devices**



**2500 Amps 33300 Joules<sup>SS</sup> 12 Volts**

ENGINE:	Instantly jump start gasoline engines up to 6.0L and diesel engines up to 4.0L
DIMENSIONS:	8.5" (L) x 3.5" (W) x 9.5" (H)
UNIT WEIGHT:	4.4 lbs.
BATTERY TYPE:	High output premium lithium-Ion
CAPACITY:	59.2 Watt-hours (59,200 mWh)
JOULES <sup>SS</sup> :	33300
AMPS:	2500 Amps (<200 ms)
VOLTS:	12
LIFETIME PERFORMANCE:	Up to 5000 starts
STORAGE TEMP:	40° F to 75° F (4°C to 24°C)
WARRANTY:	One year



Lightweight! Only 4.4 lbs.!



JP-12-2500



**5000 Amps 66000 Joules<sup>SS</sup> 12 Volts**

ENGINE:	Instantly jump starts diesel and gasoline engines up to 10 liters
DIMENSIONS:	10.93" (L) x 4.33" (W) x 10.78" (H)
UNIT WEIGHT:	9.6 lbs. With case: 15.5 lbs.
BATTERY TYPE:	High output premium lithium-Ion
CAPACITY:	118.4 Watt-hours (118,400 mWh)
JOULES <sup>SS</sup> :	66000
AMPS:	5000 Amps (<200 ms)
VOLTS:	12
LIFETIME PERFORMANCE:	Up to 5000 starts
STORAGE TEMP:	40° F to 75° F (4°C to 24°C)
WARRANTY:	One year



Lightweight! Only 9.6 lbs.!



JP-12-5000



**10,000 Amps 133200 Joules<sup>5S</sup> 12 Volts**



*Lightweight! Only 11.1 lbs.!*

ENGINE:	Instantly jump starts diesel engines up to 16 liters
DIMENSIONS:	10.93" (L) x 4.33" (W) x 10.78" (H)
UNIT WEIGHT:	11.1 lbs. With case: 17 lbs.
BATTERY TYPE:	High output premium lithium-Ion
CAPACITY:	236.8 Watt-hours (236,800 mWh)
JOULES <sup>5S</sup> :	133200
AMPS:	10,000 Amps (<200 ms)
VOLTS:	12
LIFETIME PERFORMANCE:	Up to 5000 starts
STORAGE TEMP:	40° F to 75° F (4°C to 24°C)
WARRANTY:	One year



**Heavy Duty Wheeled Starting Equipment Battery Powered**

**Portable Jump Starting Solutions for Repair Shops, Parking Lots and Garages**

**1800 Amps 12/24 Volts**

POWER SOURCE:	(2) Group 31 AGM batteries
JUMP STARTING:	12/24 volt
CABLES:	10' 4/0 ga.
CLAMPS:	1,000 AMP
DIMENSIONS:	20" (L) x 26" (W) x 48" (H)
UNIT WEIGHT:	77 lbs.

**Features:**

- Fully automatic internal AC charger to keep battery in ready-to-use condition
- Extra large pneumatic tires for easy mobility
- Volt metered to monitor battery charge level of the Boost•All® or vehicle



Plug it in and leave it plugged in. Ready when you need it. Integrated, fully-automatic 120 volt AC charger.

13-224

Requires 2 group 31 AGM batteries, 3/8" threaded top post, 900 CCA or higher (batteries not included)

**Vehicle-Mounted, Battery Powered, Heavy-Duty, Turn-Key Starting Solutions**

**12/24 Volts**

<b>POWER SOURCE:</b>	2 or 4 auxiliary jump starting batteries
<b>CABLES:</b>	25' 2/0 ga.
<b>CLAMPS:</b>	1,000 AMP
<b>DIMENSIONS:</b>	10" (L) x 12" (W) x 10" (H)
<b>UNIT WEIGHT:</b>	50 lbs. (w/o batteries)

Output dependent on number of auxiliary batteries.



13-425

Make it a complete kit: battery box, group 31 batteries, booster cables, and connecting cables available.

With Protect-All

**12/24 Volts**

<b>POWER SOURCE:</b>	2 or 4 Group 31 batteries
<b>JUMP STARTING:</b>	12/24 Volt
<b>CABLES:</b>	25' 2/0 ga.
<b>CLAMPS:</b>	1,000 AMP
<b>DIMENSIONS:</b>	16"(W) x 9" (D) x 17" (H)
<b>UNIT WEIGHT:</b>	48 lbs. (with cables)

Output dependent on number of auxiliary batteries.



**PROTECT-ALL**  
Safety Technology

13-492-001

Make it a complete kit: battery box, group 31 batteries, booster cables, and connecting cables available.

### Battery Driven

#### 1500 Amps 24 Volts

POWER SOURCE:	Vanair® Super Capacitor™ (VSC™) and (2) Group 31 AGM batteries
JUMP STARTING:	24 volt
CABLES:	26' 4/0 ga.
CLAMPS:	1,000 AMP Full Power
DIMENSIONS:	44" (L) x 20" (W) x 14" (H)
UNIT WEIGHT:	309 lbs.



#### Features:

- Capacitor can be recharged 500,000 times
- Power cells are maintenance free
- Operating temperature range from -40°F to 122°F
- Quick disconnect red plug for plug-to-plug operation
- Includes reverse polarity and dead start circuitry protection

### Engine Driven

Fast self-recharging rate of 15 seconds to start vehicle after vehicle in rapid succession.

#### 3000 Amps 12/24 Volts

12V/24V STARTING:	Up to 3240 AMP Starting Capability
DC ALTERNATOR:	240 AMP 12V/24V DC
CABLES:	30' 3/0 ga.
POWER SOURCE:	Vanair® Super Capacitor™ (VSC™) and 14.5 HP Briggs & Stratton® Engine
FUEL TYPE:	Gasoline
FUEL CAPACITY:	Integrated 1.725 Gallon Tank
DRIVE SYSTEM:	V-Belt
BATTERY:	Integrated
DIMENSIONS:	36" (L) x 21" (W) x 20" (H)
UNIT WEIGHT:	295 lbs.



**Cap-Start® 3000 Safeties:** Weather resistant electrical enclosure, reverse polarity protection, short circuit safety, and more!



## Engine Driven Plus Air Compressor

**3000 Amps 12 Volts 24 CFM**

**CAP·START**  
START·ALL

**Cap·Start® 3000+Air Light Safeties:** Weather resistant electrical enclosure, reverse polarity protection, short circuit safety, and more!



12V/24V STARTING:	Up to 3240 AMP Starting Capability
DC ALTERNATOR:	240 AMP 12VDC/24VDC
POWER SOURCE:	Vanair® Super Capacitor™ (VSC™) and 22.1 HP Honda® IGX700 EFT ETB
CABLES:	30' 3/0 ga.
CFM RATING:	24 CFM
AIR PRESSURE:	175 PSIG Max. Pressure
COMPRESSOR TYPE:	Reciprocating
FUEL TYPE:	Gasoline
FUEL CAPACITY:	Optional Remote 11 Gal. Tank
DRIVE SYSTEM:	Dual V
BATTERY:	Tie to chassis
DIMENSIONS:	45.7" (L) x 22.8" (W) x 25.4" (H) - Skid 46.7" (L) x 23.4" (W) x 42.7" (H) - 30 Gal.
UNIT WEIGHT:	360 Lbs. - Skid 479 lbs.- 30 Gal.

## Hydraulic Driven

**3000 Amps 12/24 Volts**


**CAP·START**  
START·ALL

**Cap·Start® 3000 Hydraulic Safeties:** Weather resistant electrical enclosure, reverse polarity protection, short circuit safety, and more!



12V/24V STARTING:	Up to 3240 AMP Starting Capability
MOTOR:	Gear Motor
DC ALTERNATOR:	240 AMP 12VDC/24VDC
CABLES:	30' 3/0 ga.
POWER SOURCE:	Vanair® Super Capacitor™ (VSC™)
DRIVE SYSTEM:	V-Belt
BATTERY:	Vehicle Chassis
DIMENSIONS:	24" (L) x 18" (W) x 12" (H)
UNIT WEIGHT:	150 lbs.

## Surge Protection and Cable Accessories

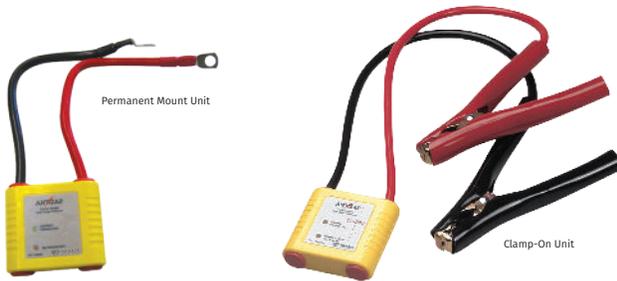

### Antizap Surge Protection\*

Eliminates the need to disconnect the battery from the terminal while welding. Provides protection for sensitive electronics.

- Protects vehicle electronics during MIG, TIG, or Argon Arc welding
- Fully insulated booster clamps with 2-function AntiZap protection
- Eliminates the time needed to disconnect the battery
- Just clip the clamps across the battery and the green LED indicates complete electrical system protection



### Plug-to-Plug Cables

#### Available in the following configurations:

- 20 ft. standard duty kit, 4 gauge with blue plug 5 ft. battery to plug, 15 ft. plug to 400 AMP clamps with weather cap
- 30 ft. standard duty kit, 4 gauge with blue plug 5 ft. battery to plug, 25 ft. plug to 400 AMP clamps with weather cap
- 20 ft. heavy duty kit, 2 gauge with blue plug 5 ft. battery to plug, 15 ft. plug to 500 AMP clamps with weather cap
- 30 ft. standard duty kit, 2 gauge with blue plug 5 ft. battery to plug, 25 ft. plug to 400 AMP clamps with weather cap
- 30 ft. extreme duty equipment kit, 1/0 gauge with red plug 5 ft. battery to plug, 25 ft. plug to 800 AMP clamps with weather cap
- 30' heavy-duty stainless steel bumper box kit — red polarity-protected plug, weatherproof stainless steel bumper box with 5' connector cable, 25' 1/0 gauge duplex welding cable with 800 AMP clamps



### Antizap Booster Cable Upgrade\*

The Antizap surge protector provides protection for delicate electronics around transient voltage spikes or voltage surges. 12/24 heavy unit duty that fits up to 3/8" diameter or 2/0 gauge cable.

- For heavy duty jumper leads 12 and 24 volt protection
- LED's indicate correct polarity and low voltage at donor battery
- Suits cable 3/8" diameter or 2/0 gauge cable.

*\*Ensure your vehicle is correctly grounded before welding.*



### Clamp-to-Clamp Cables

#### Available in the following configurations:

- 1/0 gauge, 1000 AMP - industrial
- 2 gauge, 500 AMP - heavy duty
- 4 gauge, 400 AMP
- 4 gauge, 450 AMP



800.526.8817 | [goodallmfg.com](http://goodallmfg.com)